

## DR-8364D

- Total incoming throughput 900Mbps
- Up to 1920ips Full HD real-time recording
- Supports H.265 / H.264 codec
- Supports UHD display
- Up to 1920ips live display
- Easy to install, set-up, and play with DirectIP cameras
- Expandable up to 144TB using eSATA storage
- Supports RAID 1, 5, 10
- Supports redundant power
- Supports one click network configuration through FEN service
- Supports third-party cameras (Axis, Panasonic, ONVIF)






### SPECIFICATIONS

VIDEO	
<b>Video Inputs</b>	64 IP Channels
<b>Max. Incoming Throughput</b>	900Mbps
<b>Supported Camera</b>	DirectIP, Axis, Panasonic, ONVIF
<b>Video Outputs</b>	1 HDMI, 1 VGA
<b>Display Resolution</b>	3840 x 2160, 1920 x 1200, 1920 x 1080, 1680 x 1050, 1600 x 1200
<b>Display Speed</b>	Up to 1920ips
<b>Digital Zoom</b>	x2 ~ x12
RECORDING	
<b>Max. Throughput</b>	400Mbps, 1920ips @ Full HD 240ips @ 4K (UHD)
<b>Recording Resolution</b>	Up to 12MP (Depending on IP Camera)
<b>Compression</b>	H.265, H.264
<b>Intelligent Codec</b>	Supported
<b>Recording Mode</b>	Time-lapse, Event, Pre-event, Panic
<b>Trigger Events</b>	Alarm In, Audio Detection, Motion Detection, Trip Zone, Tampering, Video Loss, Text-in, ANPR, Etc
PLAYBACK	
<b>Performance</b>	16ch Full HD Synchronous Playback 4ch 4K Playback
<b>Search Mode</b>	Time-lapse, Event Log, Thumbnail, Motion, Text-in
<b>Digital Zoom</b>	x2 ~ x12
STORAGE	
<b>HDD</b>	SATA x 8, eSATA x 4, (Up to 6TB Capacity for Each Disk), RAID 1, 5, 10 Supported
<b>Total Capacity</b>	144TB = 6TB x (8 (Internal) + 4 x 4 (External))
NETWORK	
<b>Client Connection</b>	Gigabit Ethernet (Client) x 1
<b>Video In Connection</b>	Gigabit Ethernet (Video In) x 3, SFP (Video In) x 2
<b>Transmission Speed</b>	400Mbps / 500Mbps (BRP Mode)
<b>Camera Power</b>	-
<b>Remote Data Export</b>	IDIS Player, AVI, JPG
<b>Event Notification</b>	Email (Attach Clip (.cbf) .MP4), Callback to Remote S/W, Push Notification (IDIS Mobile), SNS (Twitter)
<b>Two-way Audio</b>	Yes
<b>Client Viewer</b>	IDIS Center, IDIS Mobile, IDIS Web, IDIS Solution Suite
INTERFACE	
<b>Audio In / Out</b>	Local (NVR) : 1 RCA / 1 RCA + 1 HDMI IP Camera : 64 / 64 (Depending on IP Camera)
<b>Alarm In / Out</b>	Local (NVR) : 4 / 1 IP Camera : 64 / 64 (Depending on IP Camera)
<b>Alarm Reset In</b>	1
<b>Serial Interface</b>	RS232 (Terminal Block), RS485 (Terminal Block)
<b>USB</b>	USB 2.0 x 2, USB 3.0 x 1
<b>User Interface</b>	Mouse, IR Remote Control, Network Remote Keyboard, Front Button (Panic)
GENERAL	
<b>Operating System</b>	Embedded Linux
<b>Unit Dimensions (W x H x D)</b>	482.6mm x 88mm x 523.3mm (19" x 3.5" x 20.6")
<b>Unit Weight</b>	12.3kg (21.12lb) (With 2 HDDs)
<b>Working Temperature</b>	0°C to 40°C (32°F ~ 104°F)
<b>Operating Humidity</b>	0% ~ 90%
<b>Power Input</b>	AC 100-240 V, 50/60Hz, 2.0 - 1.0A (REDUNDANT SMPS)
<b>Power Consumption</b>	120W (With 8 HDDs)
<b>Approvals</b>	FCC, UL, CE, CB, KC

### DIMENSIONS

(Unit - mm)

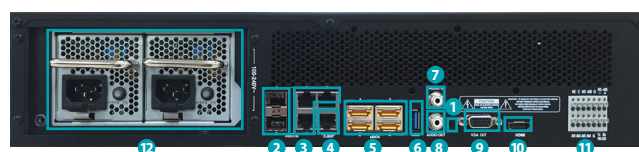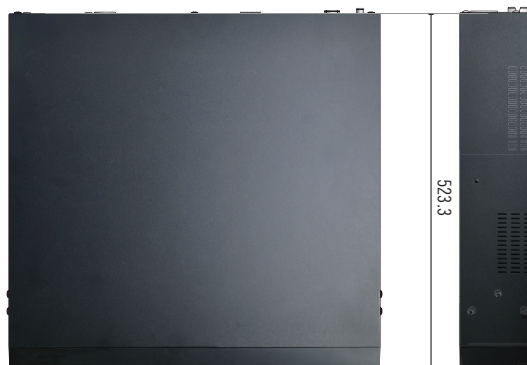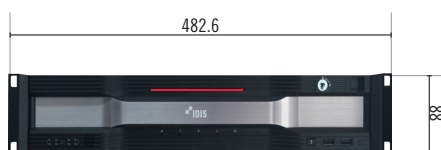

- |                        |                           |
|------------------------|---------------------------|
| 1 Factory Reset Button | 7 Audio In                |
| 2 Video In SFP Slots   | 8 Audio Out               |
| 3 Video In RJ45        | 9 VGA Out Port            |
| 4 Network Port         | 10 HDMI                   |
| 5 eSATA Ports          | 11 Alarm Connection Ports |
| 6 USB 3.0              | 12 Power In Port          |

### ACCESSORIES (OPTIONAL)



DH-2212PF



DA-ES1104